


M-5000/M159TM/M159 (bronze/chrome) M-5700/M750TM/M750 (stainless steel)

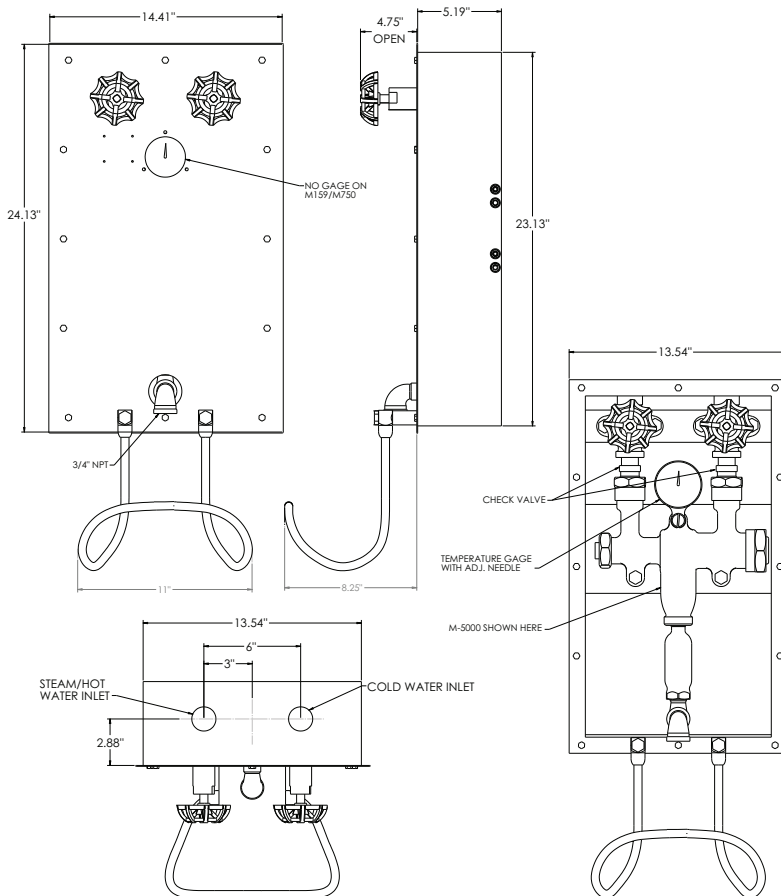

SPECIFICATIONS:

- Strahman's recessed, instant hot water makers, redesigned to conceal mixing unit piping in a stainless steel box for recessed mounting.
- All exposed parts are either chrome-plated bronze or stainless steel, depending on the unit selected.
- These units are ideal for new construction or other places where concealed piping and good looks are desirable.
- Maximum recommended operating temperature: 200°F/93°C
- Maximum working pressure: 150 psi

NOTE: When ordering, specify angle valves (back entry), or globe valves (top entry). Custom enclosures available for surface mounting and/or inclusion of auxiliary equipment.

www.strahmanvalves.com

ISO 9001:2000 Management System Registered

Corporate: 2801 Baglyos Circle, Lehigh Valley Industrial Park VI, Bethlehem, PA 18020, USA • Tel: 484-893-5080 • Fax: 484-893-5099

France: Savoie Hexapole, F-73420 Mery, France • Tel: 33 4 76 35 78 00 • Fax: 33 4 79 35 78 20

United Kingdom: PO Box 75, Sutton, Surrey SM3 9WA, England • Tel: 44 (0) 20 8641 5985 • Fax: 44 (0) 22 8288 1500

Germany: Eisenbahnstrasse 104a • D-77833 Ottersweier, Germany • Tel: 49 7223 22057 • Fax: 49 7223 20165