

**Proven Performance
Proven Technology
Proven Support**

Information Technology (IT) at the component level! An infrared (IR) Combustible Gas sensor module with the brilliance to provide Sentry, 4-20 mA or Modbus output. A stand alone module with the intelligence to provide integral alarms. A base model already loaded with features you need. A gas detector with a **Sierra Monitor** pedigree, **Factory Mutual** approved and ready to **Manage Your Gas Risk**. The 5100-28-IT provides all the built-in features desired by instrumentation and safety professionals, including:

- FM Approval for performance and safety
- SIL Certified - SIL-1
- Aluminum or 316 Stainless Steel enclosure
- Integral alarm relays – High, Low, Trouble
- Integral scrolling LED display
- 4-20 mA output
- Modbus RTU RS-485 interface
- SMC Sentry digital bus interface
- Option for non-Methane gas configuration
- Annual calibration frequency
- Interface to multiple protocols
- Remote alarm reset
- Optional remote sensor
- Optional integral 8 amp relays

The 5100-28-IT can be used as a 4-20 mA component or as a Modbus RTU node. For higher level system capability the module can interface directly to Sierra Monitor's Sentry Controller. As part of a Sentry system the user gains capability of system Modbus serial communications, extensive diagnostic features, area and zone alarm management, LanServer interface and multiplexing sensor connections.



Factory Mutual (FM) Approval for performance, electrical safety and environmental parameters including Class I, Div. 1, Groups B, C, D and Class I, Zone 1, Group IIB+H2 IP66. The 5100-28-IT is also SIL Certified and meets NFPA-72 requirements for gas detectors.

How It Works

Most combustible gases absorb infrared light energy at defined wavelengths, providing an absorption signature for that gas. The principle of an infrared detector is based upon the absorption of the infrared light at a specific wavelength as it passes through the gas. The more of the absorbing gas that is present, the more light is absorbed. The detector measures the energy from an infrared light beam at a wavelength that is absorbed by the gas and compares it to the energy emitted by the source. The difference in energy received by the detector indicates the level of gas in the atmosphere.

Features

- Local scrolling display
- Non-intrusive calibration, menu driven system
- FM Approved for performance and hazardous area operation, Class I, Div. 1, Group B, C, D. NEMA 4X rated for -40° to 176°F areas
- Flexible Modbus, 4-20mA, Sentry bus, relay interface
- SIL Certified

Benefits

- Ease of calibration and easy access to gas concentration, relay status and diagnostics
- Able to easily and quickly calibrate module without declassifying the area
- For safe and reliable operation in hazardous areas
- Easy to install in a variety of field applications plus easy to obtain critical safety information wherever needed
- Meets long term reliability design standards


Specifications:

Sensor type: Infrared, Dual Wavelength
Performance:
 Dual Range:
 Default: 0-100% LEL Methane or Propane
 User Setting: 0-100% by vol. Methane
 Other gases: %LEL Ethanol, Ethylene, Hexane, Butane, Propane, Pentane
 Repeatability: +/-1% LEL
 Response time: <10 sec to 60% full scale
 Accuracy: +/- 1% for 0-50% LEL range

 +/- 2% for 51-100% LEL range
 Sensor Life: Typically >5 years
Output:
 Display: Fixed and Scrolling LED
 Relay: 0.25 Amp. High Alarm, Low Alarm, Trouble, all SPDT
 Signal Output: Sentry digital bus
 Analog 4-20 mA (Trouble, 0 mA)
 Serial RS-485 Modbus RTU
 Optional Relays: 8 amp high, low

Electrical Data:
 Power consumption: 3 watts
 Connection type: 3 or 4 wire
 Input voltage: 24 VDC nominal: 10-30VDC
Operating Range:
 Ambient Temp Range: -4° to 140°F (-20° to 60°C)
 Relative Humidity: 5-99%
Construction:
 Dimensions: (Al) 8.1 x 4.8 x 4.9 in. (21 x 12 x 12.cm) (SS) 7.5 x 4.4 x 4.9 in. (19 x 11 x 12 cm) (Al) 2.7 lb. (1.3 Kg) --- (SS) 5.4 lb. (2.6 Kg)
 Housing: Standard: Epoxy coated Aluminum
 Optional: 316 Stainless Steel
 Hazardous Area Classification: Explosion proof, Class I, Div. 1, Groups B, C, D Class I, Zone 1 Group IIB+H2 IP66, IP65
 Warranty: 2 years
Approvals:
 FM Approval 6320
 FM Approval 3600
 SIL Certified
 NFPA72 Compliant
 Combustible Gas Detector Performance Class I Div. 1, Groups B, C, D FMEDA data for SIL-1

Specifications subject to change without notice

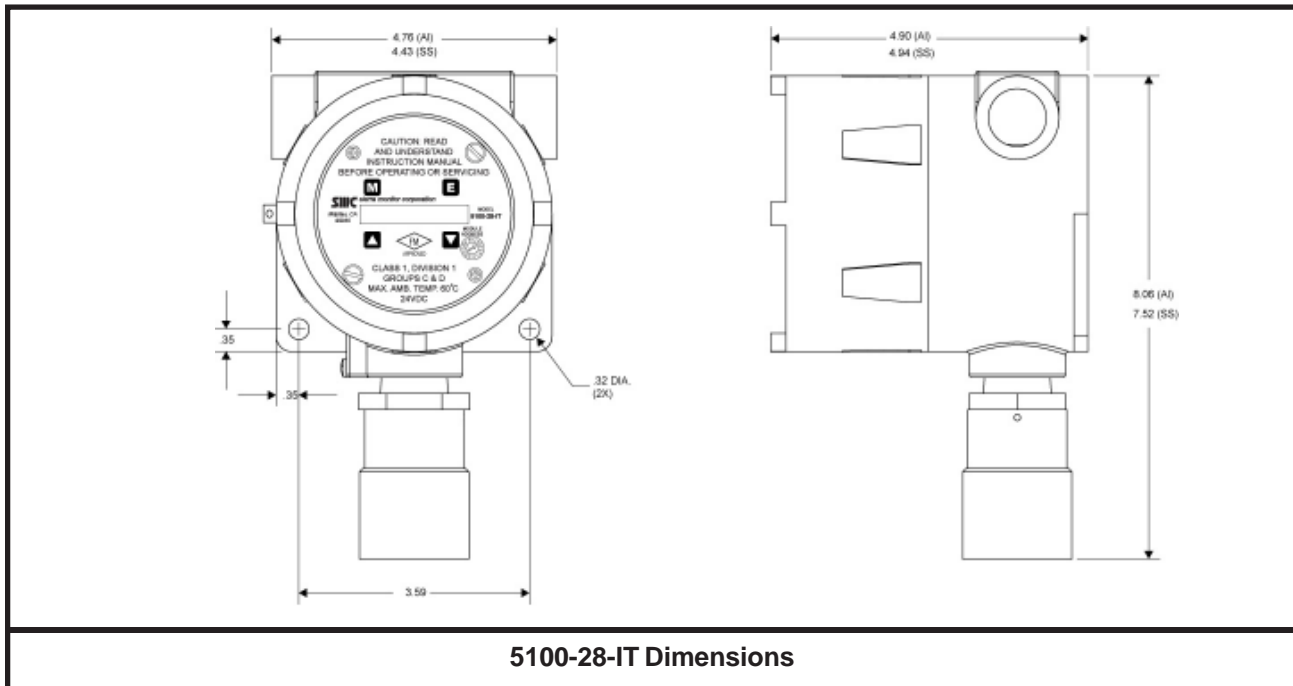

5100-28-IT Dimensions

Ordering Information

5100-28-IT-AA Combustible Gas Sensor Module IT Series - Aluminum
 5100-28-IT-SS Combustible Gas Sensor Module IT - 316 Stainless Steel

Options

- 5394-50 Remote Sensor Opt, (5100-28-IT)
- 5394-61 Auxiliary Connectors
- 5394-62 Auxiliary Integral 9 amp Relays
- 5394-64 Auxiliary Multidrop Connectors

Calibration Accessories

- 5358-00 Calibration Head, Magnetic
- 5358-01 Calibration Head, Standard
- 5360-00 Calibration Gas Delivery Fitting

Calibrators

Low Capacity

- 1200-26 Calibration Gas Delivery System
- 1290-02 Combustible Gas Cylinder for 1200-26

High Capacity

- 1250-01 Gas Sensor Calibration Kit, Type A
- 1260-02 Combustible Gas 50% LEL Gas Cylinder Type A