

CEM O₂ OXYGEN ANALYZER

Extractive net oxygen analyzer for use in a wet or dry gas CEM system or instrument cabinet.



SENSOR

Principle of Operation: Zirconium oxide

Operating Range: 0.1% to 100% O₂

Accuracy: ± 0.75% of reading or 0.05% O₂, whichever is greater

Response Time: < 4 seconds at 2 scfh from 2% O₂ to 20% O₂

Drift: < 0.1% of cell output per month (< 0.005% O₂ per month with 2% O₂ applied)

Max. Inlet Temp.: 400°F (204°C)

Sample Pressure: ± 2 psig max (0.14 kg/cm²)

Sample Flow: 2 to 20 scfh (0.94 to 9.4 L/min.)

Environment:

Ambient Temp: 0°F to 122°F (-18°C to 50°C)

Relative Humidity: 10% to 90%, non-condensing

Enclosure: Indoor use only

Power Requirements: 115 VAC, ± 10%, 47-63 Hz; 230 VAC, ± 10%, 47-63 Hz, 1670 VA max.

Calibration Gas Requirements: Use calibration gases @ 2 to 20 scfh (0.94 to 9.4 L/min.)

Zero Gas: 0.1% to 10% O₂, balance N₂

Span Gas: Minimum one decade above zero gas (10 times greater)

SERIES 2000 CONTROL UNIT

Display: Four line x 20 character vacuum fluorescent. Displays combinations of oxygen time and date, cell temperature, user programmable text, thermocouple mV or cell mV. Password protection, programmable pressure compensation and context-sensitive help are also provided.

Analog Output: Two isolated linear current outputs. Select O₂, cell temperature, thermocouple mV or cell mV. Each output can be 4-20 mA, 0-20 mA, 20-4 mA or 20-0 mA, and is fully scalable. Hold or track during calibration and select degree of damping. Maximum load 1200 ohms.

Alarms: Two independent oxygen alarms, each high or low selectable. One alarm can be assigned as oxygen, calibrate or verify. Set relays to energize or de-energize on alarm.

Contact Rating: 1A, 30V max. noninductive load, AC or DC

Diagnostics: Watchdog timer and service alarms. System test for A/D, RAM, EEPROM and keypad. Display line 4 reserved for full text error and diagnostic messages. Twenty entry exception log for automatically detected system events.

Communications: RS-485, 2-way addressable

Environment:

Ambient Temp: 14°F to 122°F (-10°C to 50°C)

Relative Humidity: 10% to 80%, non-condensing

Enclosure: Standard GP (general purpose) 19" rack mount. Optional GP panel or wall mount, weatherproof NEMA 4 (IP56) and NEMA 4X (IP56) enclosures available. All are UL Listed for NEC Class I, Division 2 areas.

Calibration: Store last calibration and verification data. Selectable calibration gas run time and process recovery time. Timed automatic calibration with optional Remote Calibration Unit. Oxygen cell lifetime extender. Single gas verification that analyzer is within calibration limits.

Power Requirements: Nominal 115-230 VAC ±10%, 47-63 Hz, 75 VA max.

System Compliance:

EMC Directive 2004/108/EC

Low Voltage Directive 73/23/EEC

EXCESS FUEL OPTION


Extends operating range of analyzer from excess oxygen only to include substoichiometric conditions (excess fuel). Allows two-point calibration in excess fuel range. Measure, display, and provide alarms and analog outputs as follows:

- Display Options: Excess fuel, combustibles, oxides/ fuel, fuel/oxides, combined excess oxygen/excess fuel (combustibles)
- Display Range: 0-50% excess fuel
- Output Range: 0-1% to 0-50% excess fuel
- Alarms: Standard alarms can be used for high or low excess fuel levels

CEM O₂ ANALYZER


SENSOR

APPROX. WEIGHT 24 LB (10.9 KG)

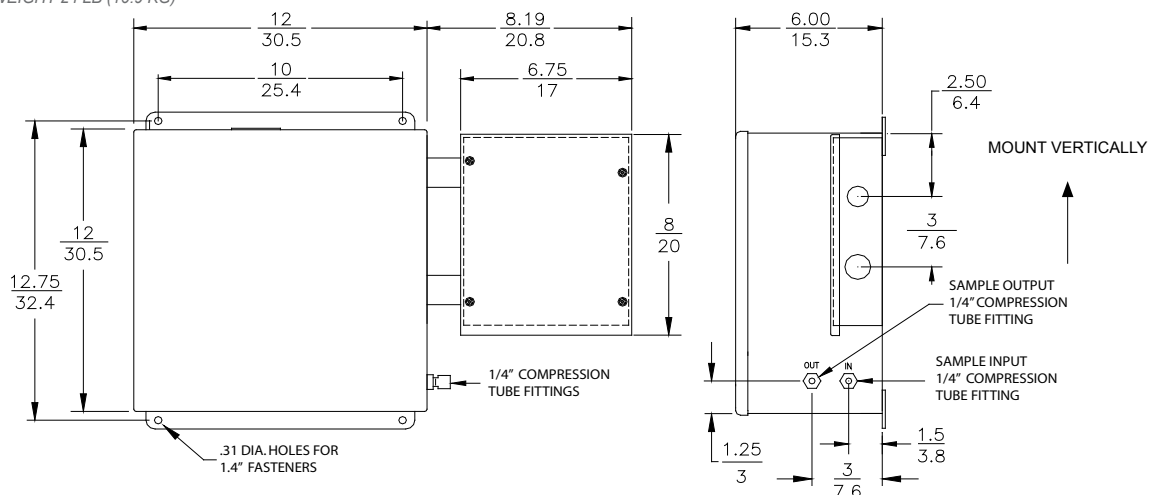


REMOTE CALIBRATION UNIT

APPROX. WEIGHT: 8 LB (3.6 KG)

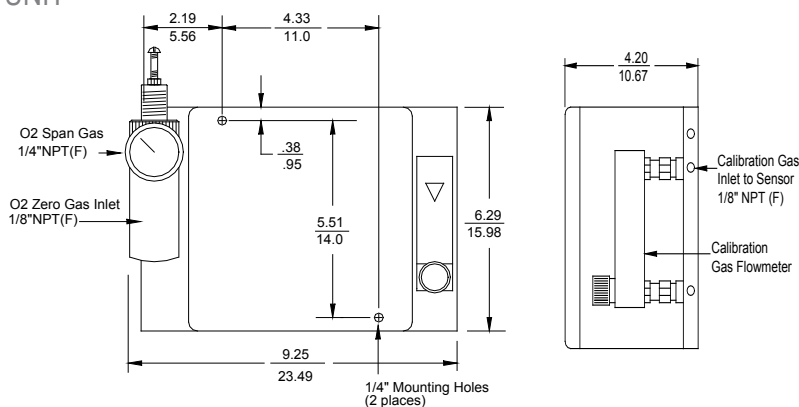

SERIES 2000 CONTROL UNIT

APPROX. WEIGHT: 14 LB (6.36 KG)

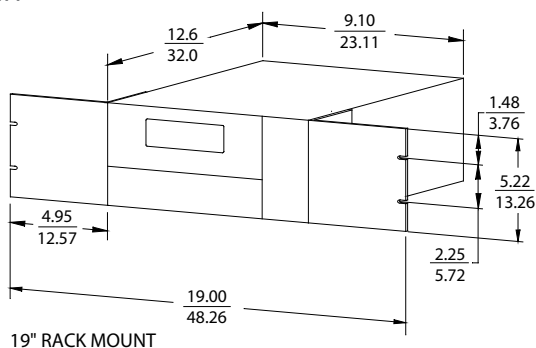

NOTES:

1. All static performance characteristics are with operating variables constant.
2. System accuracy referenced to 0.1 to 10% calibrated range.
3. Response is to calibration gas.

AMETEK
PROCESS INSTRUMENTS

150 Freeport Road, Pittsburgh, PA 15238
Ph. +1-412-828-9040, Fax +1-412-826-0399
www.thermox.com



© 2006, by AMETEK, Inc.
All rights reserved. Printed in the U.S.A.
P400 (8/07)

One of a family of innovative process analyzer solutions from AMETEK Process Instruments.
Specifications subject to change without notice.

SALES AND MANUFACTURING:

USA - Delaware
455 Corporate Blvd., Newark DE 19702 • Tel: +1-302-456-4400, Fax: +1-302-456-4444

USA - Oklahoma
2001 N. Indianwood Ave., Broken Arrow OK 74012 • Tel: +1-918-250-7200, Fax: +1-918-459-0165

CANADA - Alberta
2876 Sunridge Way N.E., Calgary, AB T1Y 7H9 • Tel: +1-403-235-8400, Fax: +1-403-248-3550

WORLDWIDE SALES AND SERVICE LOCATIONS:

USA - Texas
Tel: +1-281-463-2820, Fax: +1-281-463-2701

CHINA
Beijing / Tel: 86 10 8526 2111, Fax: 86 10 8526 2141
Chengdu / Tel: 86 28 8675 8111, Fax: 86 28-8675 8141
Shanghai / Tel: 86 21 6426 8111, Fax: 86 21 6426 7818

FRANCE
Tel: 33 1 30 68 89 00, Fax: 33 1 30 68 89 99

GERMANY
Tel: 49 21 59 91 36 0, Fax: 49 21 59 91 3680

MIDDLE EAST - Dubai
Tel: 971 4 881 2052, Fax: 971 4 881 2053

SINGAPORE
Tel: 65 6484 2388, Fax: 65 6481 6588

THE
THERMOX[®]